




TEK

Inliners

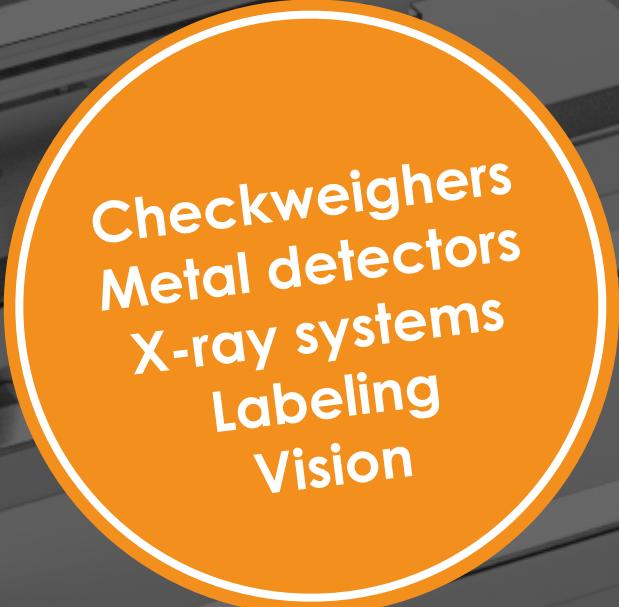

Checkweighers
Metal detectors
X-ray systems
Labeling
Vision

Inliners

Teltek LS100

Teltek LS100 is unbeatable at handling and organizing products that are difficult to move laterally, e.g. flat and/or light products.

The Teltek LS100 comes with a stainless steel stand and electronics cabinet. The conveyor units are made of anodized aluminium.

The system is controlled via a PLC system. Timers are very easy to adjust on the built in PLC display, no need for PC or special software. Start signal either from the included photocell or a trig from the packaging machine.

The operation is based on a sideways movement and out feed line by line in the exact same position.

The sideways movement is handled by a servo motor that ensures very smooth yet fast and precise operation.

It is also possible to let the LS100 make an extra separation of the products on outfeed.

Capacity is determined by the length of the incoming feed and the number of conveyors.

Depending on design, the LS100 can handle a total of up to 80 products per minute.

Teltek LS100 is CE marked and can be supplied with several, very easily interchanged, conveyor options.



Conveyor
Height: 700-1000 mm
Total Length: 300-800 mm
Total width: 250-500 mm

Dimensions
Length: 700-1000 mm
Width: 900-1200 mm
Voltage: 230 VAC
CE-approval: Yes

The dimensions of the inliner is brought in line with customers needs.

Teltek LS150

Teltek LS150 is the fastest solution available for creating a single line of products.

The Teltek LS150 comes with a stainless steel stand and electronics cabinet. The conveyor units are made of anodized aluminium. The system is controlled via a PLC system.

Timers are very easy to adjust on the built in PLC display, no need for PC or special software.

Start signal either from the included photocell or a trig from the packaging machine. First the products are separated in length and then guided towards the center of the belt.

The design of the side guides minimizes the risk of turning the product, which simplifies the task for downstream machines.

It is also possible to let the LS150 make an extra separation of the products on outfeed. Capacity is determined by the length of the incoming feed and the number of conveyors.

Depending on design, the LS150 can handle a total of up to 150 products per minute.

Teltek LS150 is CE marked and can be supplied with several, very easily interchanged, conveyor options.



Conveyor
Height: 700-1000 mm
Total Length: 300-800 mm
Total width: 250-500 mm

Dimensions
Length: 500-1500 mm
Width: 250-500 mm

Voltage: 230 VAC
CE-approval: Yes

The dimensions of the inliner is brought in line with customers needs.



Sales



Anders Englund
Sales Manager
+46 (0)19 311 302
anders.englund@teltek.se



Magnus Svensson
Export Manager
+46 (0) 19 76 03 961
magnus.svensson@teltek.se



Jimmy Österdahl
Sales support
+46 (0)19 311 508
jimmy.osterdahl@teltek.se



Ulf Persson
Sales north region
+46 (0)19 277 30 60
ulf.persson@teltek.se



Robert Olausson
Sales south region
+46 (0)19 277 13 08
robert.olausson@teltek.se

TELTEK I ÖREBRO AB

Argongatan 83 · SE-703 74 Örebro · Sweden

Tel: +46 (0)19 311 300

info@teltek.se · www.teltek.se